



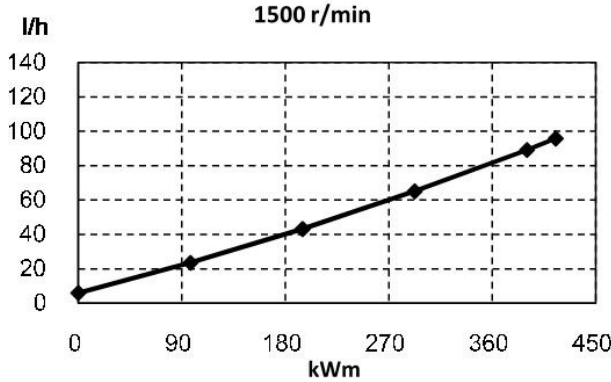
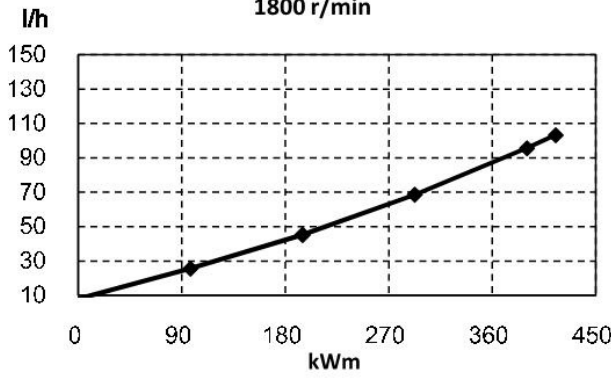
Cummins

Technical Operations

Engine Model : 6ZTAA13-G2

Curve and Datasheet : FR20349

Rev00 2012.6

	Generator Engine Performance Data		Engine Model		Curve Number	CPL Code
	Cummins Engine Co.,Ltd		6ZTAA13-G2		FR20349	3715
Compression Ratio: 17:1 Cylinders: 6 Bore: 130 mm Stroke: 163 mm Displacement: 13.0 L			Engine Configuration: D0C3006GX03 Fuel System: BYC PD/GAC Aspiration: Turbocharged & Charge Air Cooled Governor Regulation: ≤3% Emission Certification: MEP STAGE II			
Engine Ratings*:						
Engine Speed	Standby Power		Prime Power		Continuous Power	
r/min	bhp	kWm	bhp	kWm	bhp	kWm
1500	557	415	523	390	470	350
1800	557	415	523	390	470	350
* All ratings refer to AEB26.02.						
Engine Fuel Consumption @1500 r/min						
OUTPUT POWER			FUEL CONSUMPTION			
%	bhp	kWm	lb/bhp.h	g/kWm.h	gal/h	l/h
Standby Power						
100	557	415	0.319	194	363	95.8
Prime Power						
100	523	390	0.316	192	338	89.1
75	393	293	0.308	187	247	65.1
50	262	195	0.306	186	164	43.2
25	131	98	0.334	203	89	23.6
Continuous Power						
100	470	350	0.311	189	298	78.8
						
Engine Fuel Consumption @1800 r/min						
OUTPUT POWER			FUEL CONSUMPTION			
%	bhp	kWm	lb/bhp.h	g/kWm.h	gal/h	l/h
Standby Power						
100	557	415	0.344	209	391	103.3
Prime Power						
100	523	390	0.339	206	362	95.6
75	393	293	0.324	197	260	68.6
50	262	195	0.321	195	172	45.3
25	131	98	0.363	221	97	25.7
Continuous Power						
100	470	350	0.329	200	316	83.3
						
Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 29.61 in Hg (100 kPa) barometric pressure [263 ft (80 m) altitude], 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1 kPa) water vapor pressure with No. 2 diesel fuel.						
All data obtained is based on the engine operating, under the test conditions of 14.9 in H ₂ O (3.7kPa) inlet air restriction and 2.95 in Hg (10 kPa) exhaust restriction,not included are alternator, fan, optional equipment and driven components.						
The engine may be operated up to4500 m altitude.						
1						

**Generator Engine Performance Data**

Cummins Engine Co.,Ltd

Engine Model

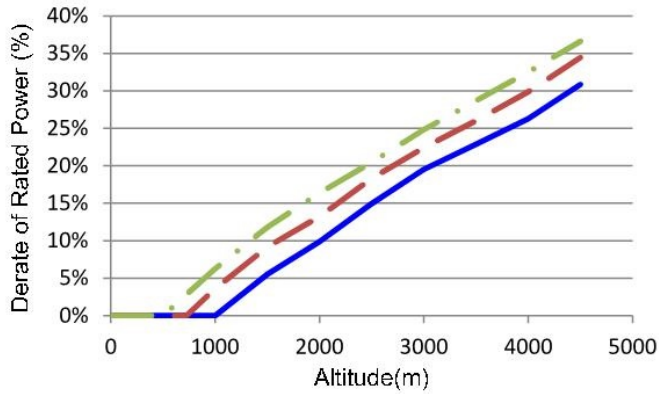
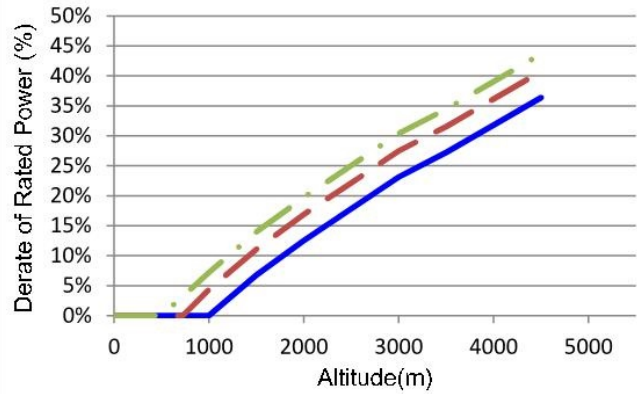
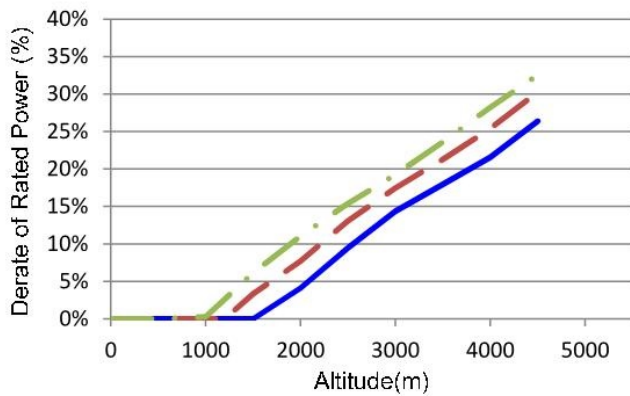
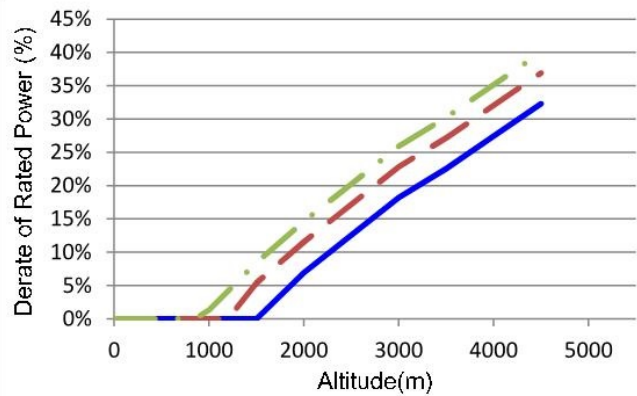
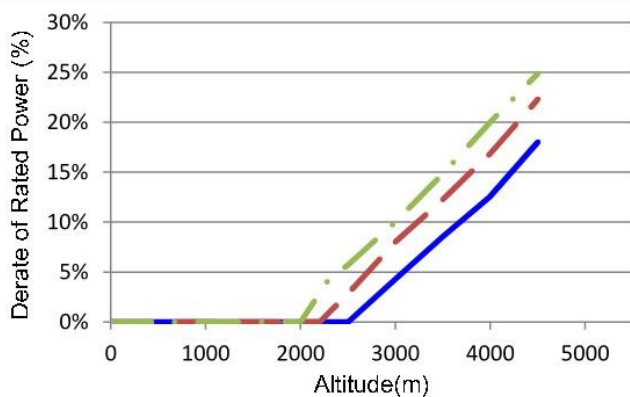
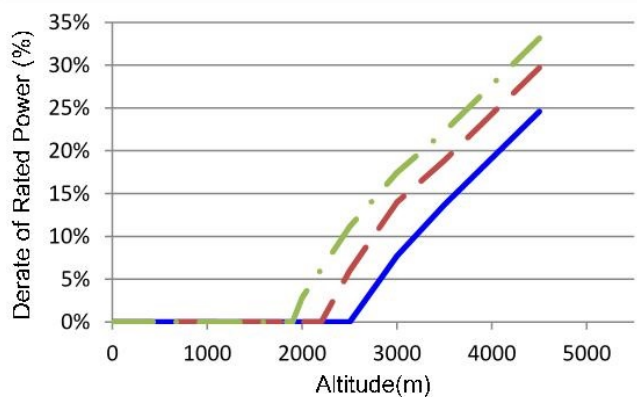
6ZTAA13-G2

Curve Number

FR20349

CPL Code

3715

Power Derate Curves @1500 r/minStandby Power**Power Derate Curves @1800 r/min**Standby PowerPrime PowerPrime PowerContinuous PowerContinuous Power

Air temperature — 25 °C (77°F) - - - 40 °C (104°F) ··· 50 °C (122°F)

Engine tested under the ISA conditions of 50 deg C charge temperature, 3.7kPa inlet air restriction and 10 kPa exhaust restriction.

	Generator Engine Performance Data	Engine Model	Curve Number	CPL Code
	Cummins Engine Co.,Ltd	6ZTAA13-G2	FR20349	3715

GENERAL ENGINE DATA

Type: Four cycle; Inline; 6 Cylinder
Aspiration: Turbocharged Charge Air Cooled
Compression Ratio: 17:1
Fire Order: 1-5-3-6-2-4
Bore x Stroke: - mm 130 x 163
Displacement: - L 13.0
Low Idle Speed: - r/min 800 -1000
Maximum altitude for continuous operation: - m 4500
Approximate Engine Weight - Dry: - kg 1200
Approximate Engine Weight - Wet: - kg 1265
Center of Gravity from front face of block: - mm 519
Center of Gravity above crankshaft centerline: - mm 201
Rotation inertia of Complete Engine (without flywheel): - kg.m² 1.48

ENGINE MOUNTING

Maximum static mounting surface bending moment
Rear face of block: - N.m 1356
Maximum static bending moment of FAN: - N.m 21
Maximum allowable weight on Engine Support: - kg 1500

AIR INDUCTION SYSTEM

Whole air intake pipe size (recommendatory): - mm 200
Charge air cooler pipe size normally acceptable (recommendatory): - mm 110
Maximum temperature rise between ambient air and engine air inlet: °C 11.1
Maximum Temp. Rise Between Engine Air Intake and Intake Manifold: °C 30
Maximum Intake Manifold Temperature (unable to result in power loss at sea level):
..... °C 60*
Maximum Intake Manifold Temperature : °C 85
Maximum intake air restriction (heavy duty air cleaner):
clean filter: - kPa 3.2
dirty filter: - kPa 6.2
Maximum allowable pressure drop across charge air cooler and OEM CAC
piping (CACDP): - kPa 13

EXHAUST SYSTEM

Max. back pressure imposed by complete exhaust system: - kPa 13
Maximum allowable static bending moment at exhaust outlet flange: - N.m 27
Exhaust pipe size normally acceptable (recommendatory): - mm 130

*When excess the temperature.the durability/reliability/performance of the engine maybe impaired.

	Generator Engine Performance Data	Engine Model	Curve Number	CPL Code
	Cummins Engine Co.,Ltd	6ZTAA13-G2	FR20349	3715

LUBRICATION SYSTEM

Oil pressure @ idle - minimum:	- kPa	82.7
Typical oil pressure range - warm engine:	- kPa	207 - 276
Total system capacity (standard pan):	- L	45.42
Maximum lube oil flow to all accessories:	- L/min	7.57

COOLING SYSTEM

Coolant Capacity (Engine Only):	- L	23.1
Engine coolant circuit thermostat opening temperature:	- °C	82
Engine coolant circuit thermostat fully open temperature:	- °C	94
Maximum coolant temperature - engine out:	- °C	102
Minimum operating block coolant temperature:	- °C	71
Maximum coolant pressure(exclusive of pressure cap; closed thermostat at maximum no load speed):	- kPa	407
Minimum pressure cap rating at sea level:	- kPa	103
Maximum Coolant Friction Head External to Engine:	- kPa	75
Maximum deaeration time:	- min	25
Minimum fill rate (low level alarm required for most engines):	- L/min	19
Maximum coolant expansion space (% total system capacity):	- %	10
Minimum coolant expansion space (% total system capacity):	- %	6

FUEL SYSTEM

Maximum allowable restriction @ OEM point with maximum fuel flow:	- kPa	20.3
Maximum fuel drain restriction (total head) before (or without) check valve:	- kPa	33.9
Minimum fuel tank venting requirement:	- L/s	0.2
Maximum fuel inlet temperature:	- °C	71
Maximum design fuel flow:	- kg/h	162

ELECTRICAL SYSTEM

System voltage:	- V	24
Minimum battery capacity-cold soak at -18 C (0 F) or above		
Engine only cold cranking amperes:	- CCA	900
Engine only reserve capacity:	- min	270

COLD START CAPABILITY

Minimum ambient temperature for unaided cold start:	- °C	-15
Minimum ambient temperature for aided cold start (Intake Air Heater):	- °C	-35

Exhaust Emissions Data

Gaseous Emissions per GB 20891-2007:		1500 r/min	1800 r/min
- Weight-Specific Nox:	- g/kW.h	5.700	4.919
- Weight-Specific HC:	- g/kW.h	0.252	0.350
- Weight-Specific CO:	- g/kW.h	0.717	0.711
- Weight-Specific Particulates:	- g/kW.h	0.172	0.192

	Generator Engine Performance Data	Engine Model	Curve Number	CPL Code
	Cummins Engine Co.,Ltd	6ZTAA13-G2	FR20349	3715

Performance Data

All data is based on: Engine operating with fuel system, water pump, lubricating oil pump and air cleaner; not included are alternator, fan, and optional equipment and driven components.

Test Condition:

- GB18297 Engine test code - Performance
- Barometric Pressure : 100 kPa (29.53 in Hg)
- Air Temperature: 25 °C (77 °F)
- Altitude: 80 m (263 ft)
- Relative Humidity: 50%

Steady State Stability Band at any constant load (+/-): 5%

		Standby Power		Prime Power	
Engine Speed	r/min	1500	1800	1500	1800
Gross Engine PowerOutput	kWm	415	415	390	390
Torque:	N.m	2642	2202	2483	2069
Brake Mean EffectivePressure	kPa	2554	2128	2400	2000
Piston Speed	m/s	8.15	9.78	8.15	9.78
Friction Horsepower	kW	31	45	31	45
Coolant Flow	L/min	366	438	366	438
Fuel Consumption	kg/h	80.5	86.7	74.9	80.3
Engine Data					
Intake Air Flow	m3/min	29.2	39.0	33.1	38.2
Exhaust Gas Temp - DryStack	°C	668	646	641	607
Exhaust Gas Flow	kg/min.	30.6	40.4	34.3	39.5
Air to Fuel ratio		24.3	25.1	25.0	26.3
Heat Rejection to Ambient	kW	67	67	63	63
Heat Rejection to JacketCoolant	kW	166	167	158	158
Heat Rejection to Exhaust	kW	359	359	337	337
Heat Rejection to Fuel*	kW	5	5	5	5
ATA CAC					
Heat Rejection to Aftercooler	kW	92	107	84	106
TurbochargerCompressor Outlet	kPa	283	271	266	260
Charge Air Flow	kg/min.	34.5	39.0	33.1	38.2
TurbochargerCompressor Outlet	°C	212	214	209	209

*This is the maximum heat rejection, not specified to the load listed.

TBD = To Be Decided

N/A = Not Applicable

All data is subject to change without notice, sorry for inform.
Cummins Engine Co., Ltd.

**Generator Engine Performance Data**

Cummins Engine Co.,Ltd

Engine Model**6ZTAA13-G2****Curve Number**

FR20349

CPL Code

3715

